

JUL 097



TECHNICAL SPECIFICATION

Technical Service Department,
JSP Ltd., Worsham Mill, Minster
Lovell, Oxford, OX29 0TA
Tel.: 01993 824000
Fax: 01993 824422

B2 Din Filter Canister

Conformity:

Meets the requirements of EN 141.
EC Certificate Number 52162, issued
by BSI Product Certification.

Performance:


Offers an assigned protection factor
(APF) of 20 x Workplace Exposure
Limit (WEL) for inorganic vapours and
gases.

Markings:

EN141 B2

Materials:

- Canister Body: ABS
- Cartridge Inner: Activated Carbon /
C/W Man Made
Scrim

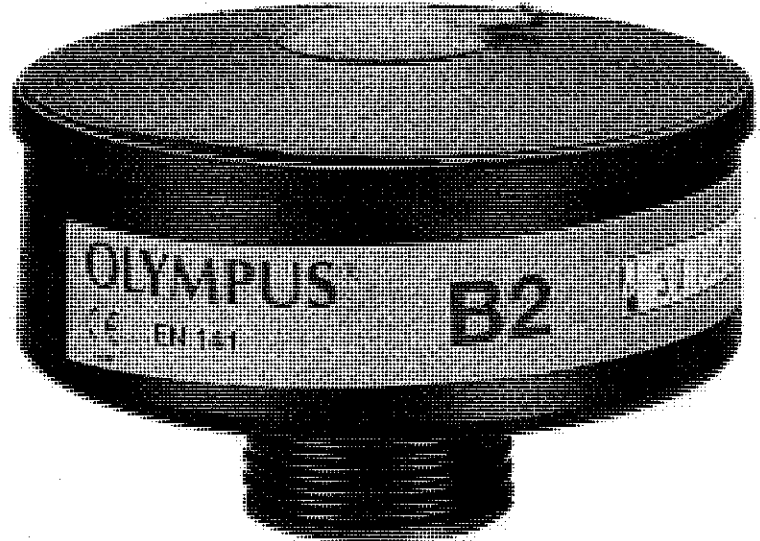

Instructions For Use:

Remove the cap from the screw fitting and also the cover from the inhalation valve. Screw the canister into the facemask inlet

Care must be taken to ensure that the correct filter type is selected for the work to be carried out. If in doubt as to the type of filter required seek professional advice.

Limitations Of Use:

Protection will only be offered if the cartridge is fitted correctly to an appropriate respirator.

Notes:

- i. The use by date is printed on the outside of the canister.***
- ii. The working life of the filter depends on many factors including work rate, airflow and concentration of any contaminant in the atmosphere. The filter should be changed immediately if, a.) Breathing difficulties due to clogging are experienced, b.) Chemical breakthrough of a contaminant is detected by smell, taste or any other means, or c.) The filter becomes damaged.***
- iii. Use in well ventilated areas only, which are not deficient in oxygen and do not contain explosive atmospheres.***
- iv. DIN Style filters only should never be made to fit masks with any other fitting type.***

Cleaning & Maintenance:

Wipe with damp cloth soaked in mild detergent solution, being careful not to get any liquid inside the cartridge. DO NOT USE abrasive substances or solvents. Cleaning the filter does not extend its life. Store unopened packs in an airtight container, out of direct sunlight away from chemicals, abrasive substances and in a dry atmosphere.

Manufacturing For Safety